




INSTALLATION

Original instructions

SLIM SAFETY RELAY UNIT

TSRU-200


CD1022/020322

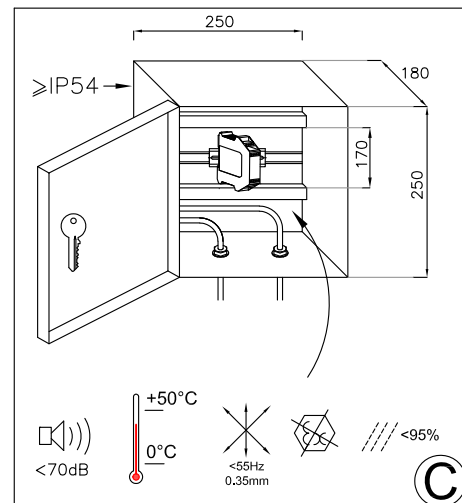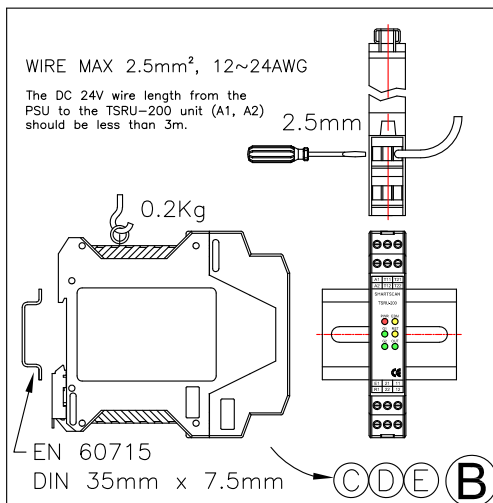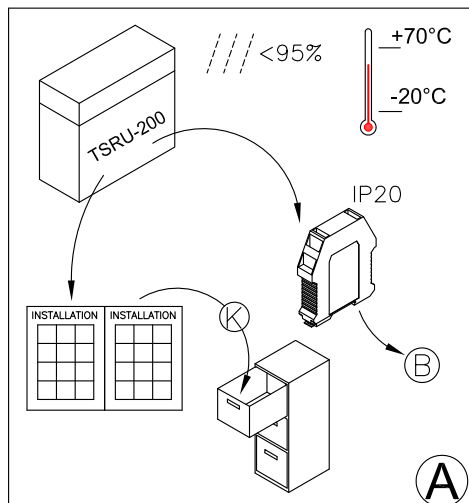

Emergency Stop Switch

E-STOP dual-channel inputs with detection of shorts across contacts

Category 4 / PL e

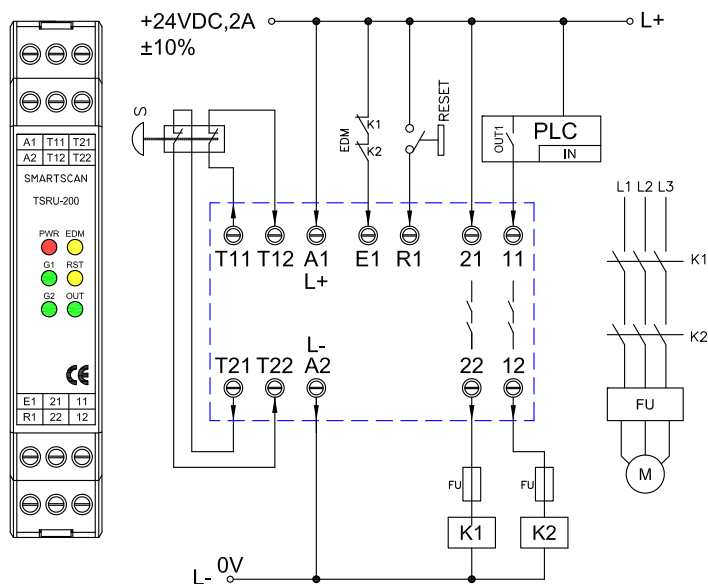


(D)


Limit Switch (Safety Door)

Safety door dual-channel inputs with detection of shorts across contacts

Category 4 / PL e

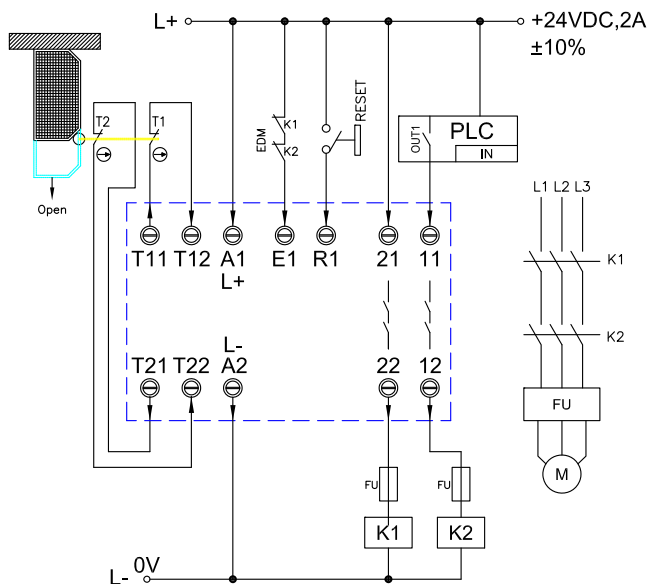

(E)

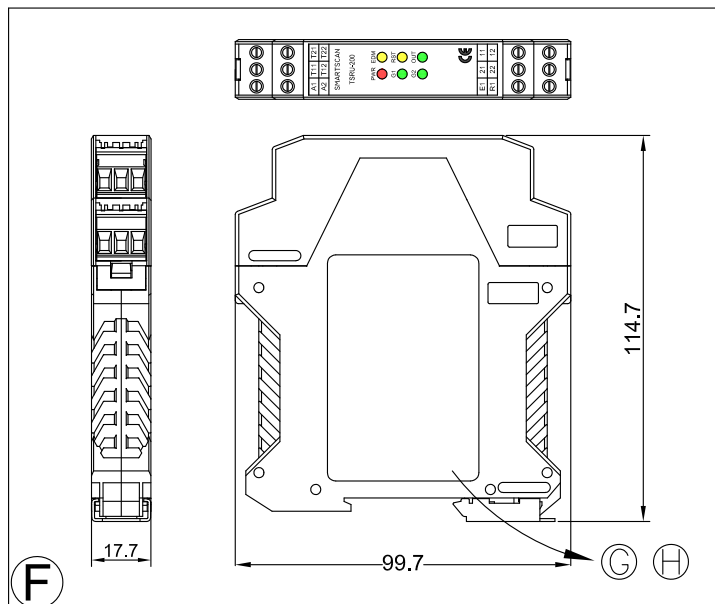

(F)

- V = +24V DC
 - I = 120mA
 - = 250V AC 2A
 - = 10⁷ OPERATIONS
 - = 20ms
 - = IP20
 - = BS EN ISO 13849-1 CATEGORY 4
 - = BS EN ISO 13849-1 PL e
 - = BS EN 62061 SIL 3
- SMARTSCAN TW LTD. 2F, No.5, 10th Road, Taichung Industrial park, Taichung City, Taiwan R.O.C
TEL: 886-4-23598885 FAX: 886-4-23599423

(G)



J



L